


Sicurezza 2.0 with co-moulded latch, round/square ends with cylinder hole, 85 mm centre, 22 mm forend

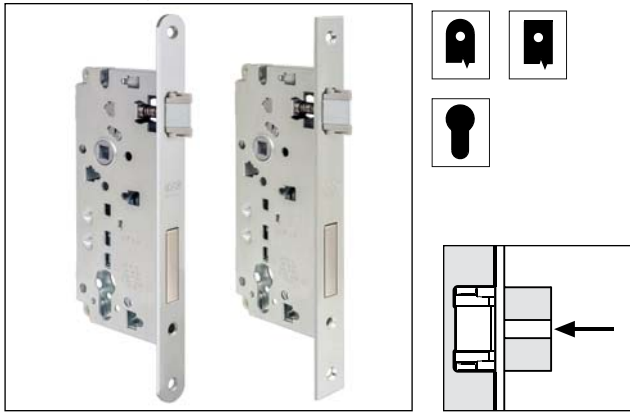

Description

Embedded lock with patented co-moulded self-lubricating latch and bolt, to be used in combination with a DIN V 18254 profile cylinder. 85 mm centre. 22 mm forend with round and square ends. 20 and 70 mm backsets. Reversible spring latch. Holes for mounting handles with through screws, Tenax and C-liner. Body and forend made of steel or brass.


Application

For interior and main timber doors.

Mounting

Prepare cutout and mill the panel according to the dimensions shown in the diagram. Secure the lock with two 4.5x25 mm screws. To reverse the spring latch, push it out of the forend by pushing with a screwdriver against the screw on the back, then rotate it.

Note. Cardboard box contains one lock and one screw for fastening the cylinder. The striker and cylinder must be ordered separately.

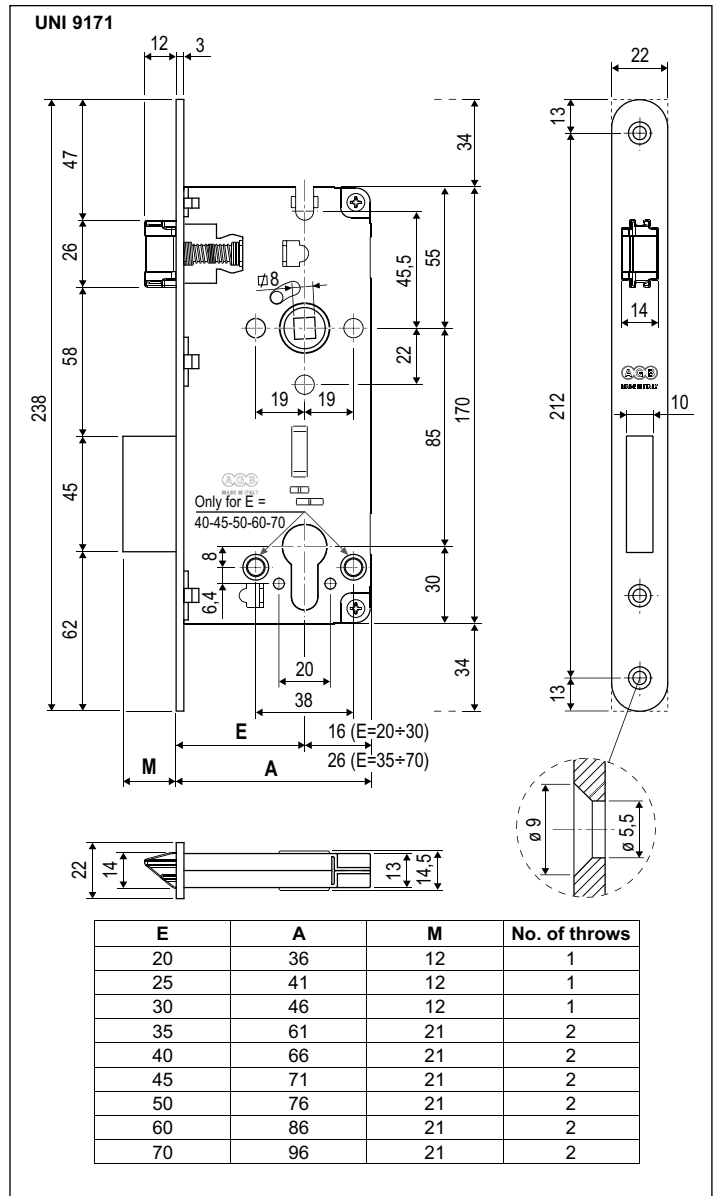

(*) For backset 25 and 30, see reversing instructions on page 01.9

Order Specifications

Material	SALES CODE		
	Ref.	Backset	Finish
STEEL	B80851	20-25-30-35-40-45-50-60-70	XX
STAINLESS STEEL	B84851	35-45-50	XX

Order Specifications

Material	SALES CODE		
	Ref.	Backset	Finish
STEEL	B80852	20-25-30-35-40-45-50-60-70	XX
STAINLESS STEEL	B84852	45-50-60	XX

Note. For backsets 40-45-50-60 there are the holes for extensible screw.

Note. For backset 20 the latch is not available in the co-moulded version.

Note. Refer to the price list in force to check the availability of the finishes.