


COMPACT




Description

Adjustable hinge designed mainly for standard production flush interior doors at least 60 cm wide, with 35 mm minimum thickness and weight up to 40 kg. The hinge is available in rh and lh kits.

Adjustment and mounting

It can be adjusted vertically and horizontally by operating with allen screw of 4 mm on the proper eccentric threaded pin positioned on the body of the hinge. Once the hinge is adjusted, fix the locking dowel with allen screw of 5 mm.

Note. Mount the safety screw on the pin only after the door is inserted in the pintles; fasten the screw only after having executed eventual adjustments, with a maximum couple of 5 Nm.

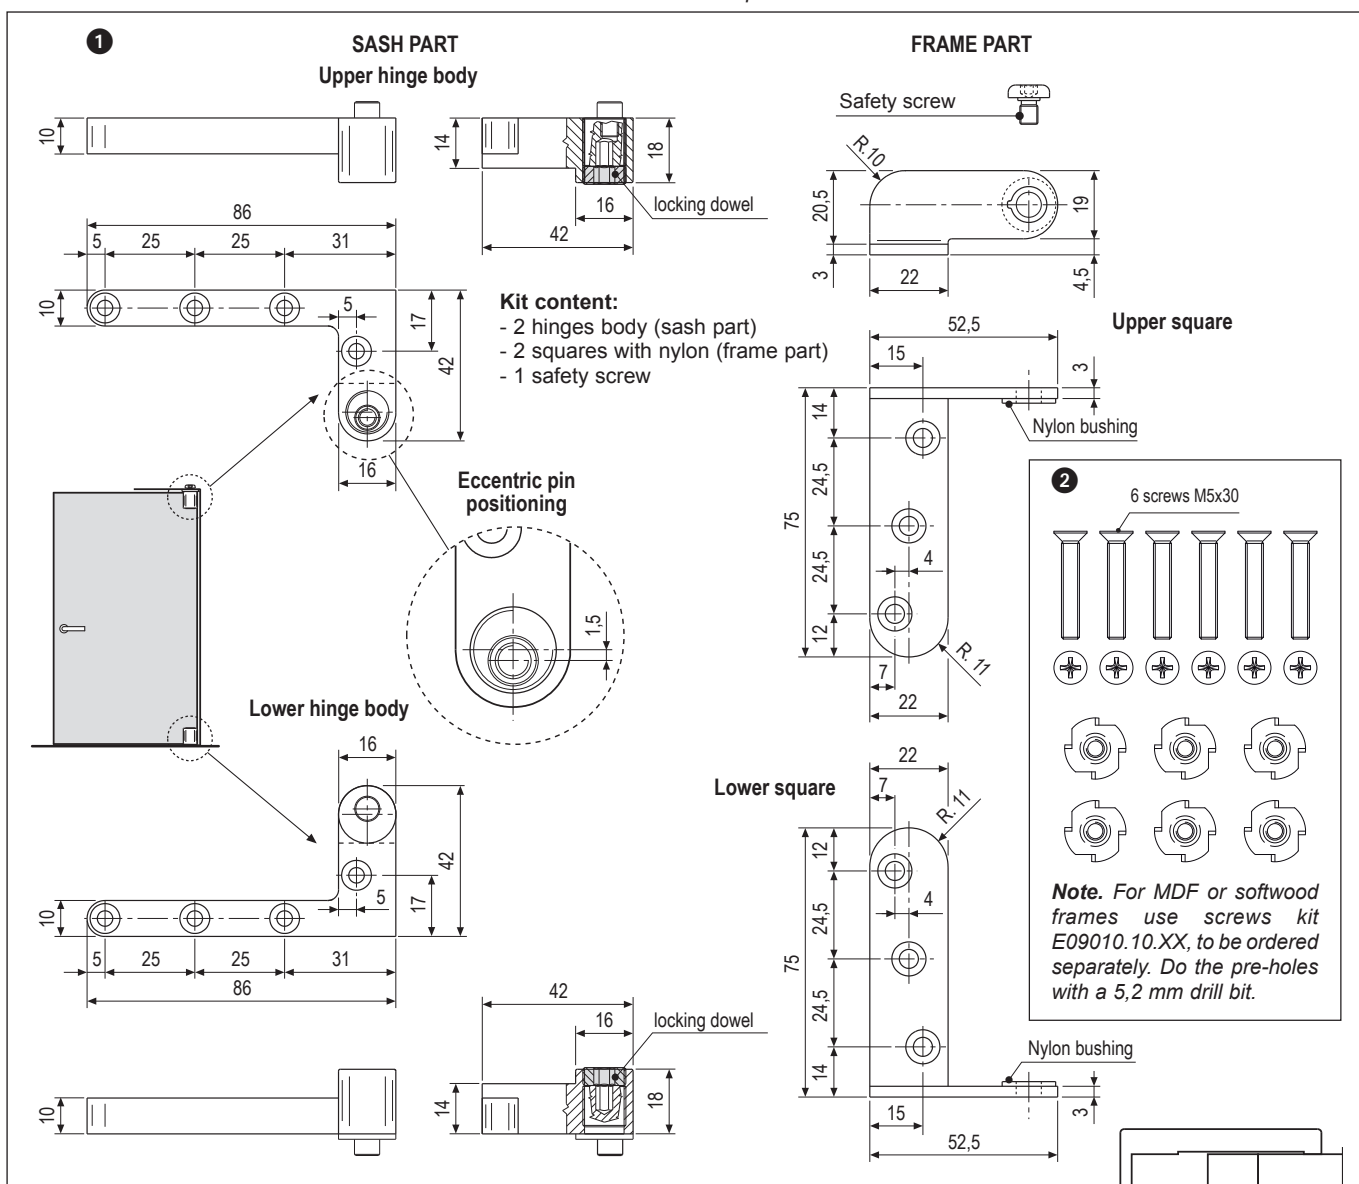

Order specifications - 1

Material	Article	Type
STEEL	E10073.10.XX	r.h.
	E10073.11.XX	l.h.

Order specifications - 2 Kit to be ordered separately

Article
E09010.10.XX

Note. Refer to the price list in force to check the availability of the finishes.