

Reduced espagnolette



Description

Handle with 180° rotation and anti-burglar security thumbturn.

It consists of a fixed support which is fastened to the stile of the shutter, and of a movable part that rotates the rod to enable the fastening and opening of the shutters. It is also available in a basic kit that includes all the accessories required for assembly on single or multiple-sash shutters.

Application





Suitable for all traditional systems with finished stiles of reduced width, at least 60 mm. The shortened espagnolette arm reduces the distance between the drive rod and the catch to a minimum of 49 mm.

- To be used in combination with drive rod and catch for single or double-sash shutters.

Mounting

Use three 4x30 mm screws with thread suitable for the shutter material.

NB. When adapters should be used please use art. H00901.63.XX and H00901.64.XX (3 and 4 mm respectively).

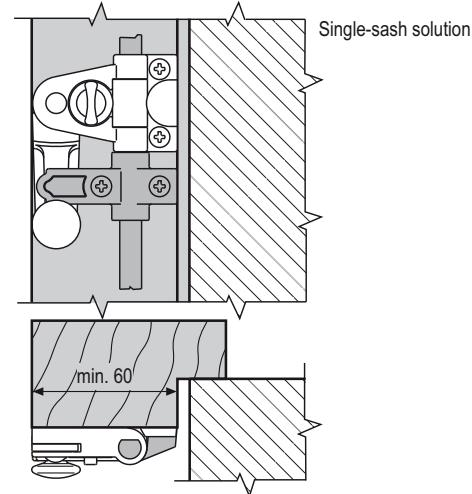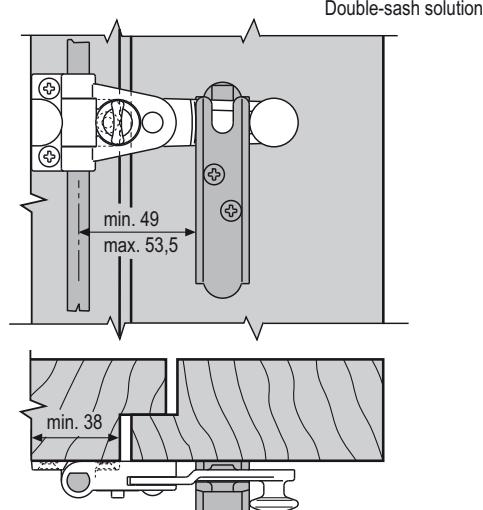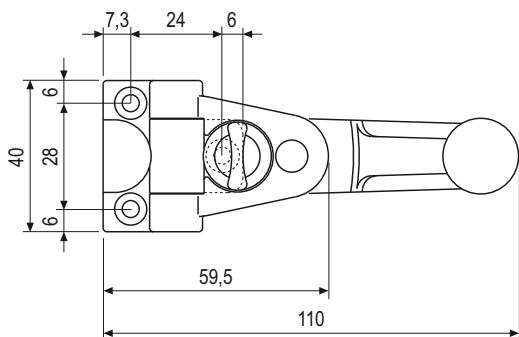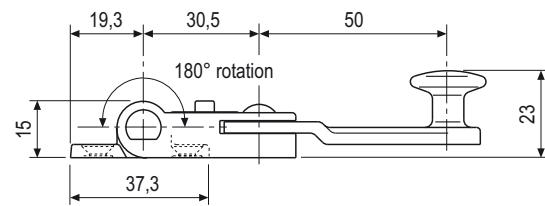

Order Specifications

Type	Article
Reduced espagnolette	H00901.05.XX

NB. Refer to the price list in force to check the availability of the finishes.