

## Fixed rebated hinge - 16x0 for corner and vertical brackets



### Description

Two-handed hinge without neck, with lip for installation on the rebate 16 mm from the rotation axis. It can be reversed thanks to a removable self-lubricating plastic bushing.

### Application

For rebated or overlapped shutters mounted on soffit or on frames that are slightly recessed from the exterior wall, forming a narrow reveal. It must be used in combination with a fixed pintle or with the threaded pintle with plate.

It is not suitable for flush shutters.



It can be connected with corner and vertical brackets, but not with horizontal brackets. It can also be fastened directly to

the shutter using compensating shim art. H00921.00.93.

### Mounting

Mount the corner or vertical bracket on the shutter and then fasten the hinge using 2 theft-proof screws: this solution ensures greater system steadiness and security. Alternatively, you can use two 4,5 mm screws of appropriate length (matching the thickness of the shutter), with thread suitable for the shutter material. Rivets can be used in case of PVC or aluminium shutters. Fasten the side lip to the rebate using two 3.5x35 mm screws with suitable thread.

**NB.** Use of wall catch for shutters is necessary with exception of low capacity models.

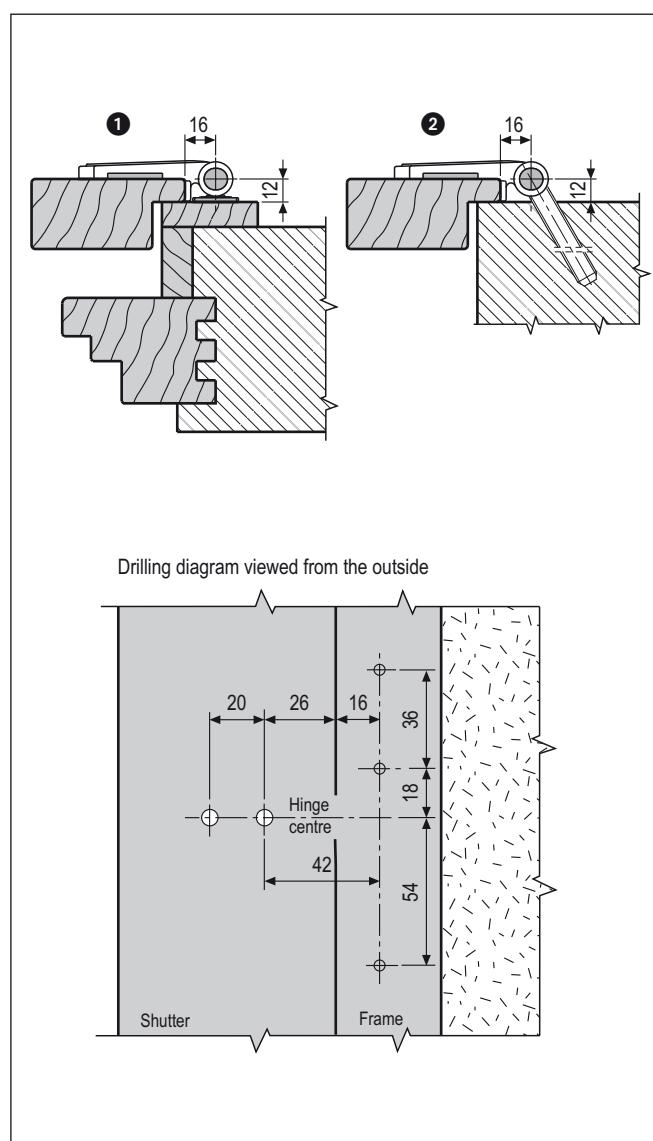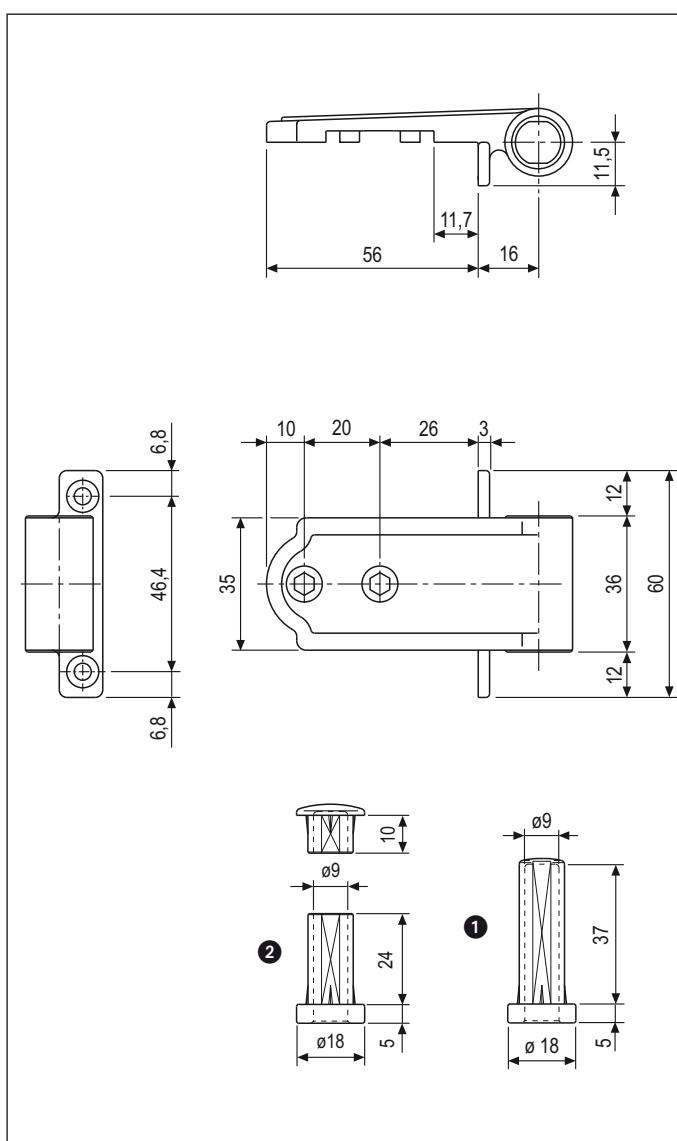

### Order Specifications

Ref.	Article
①	H00927.00.XX
② Version with bushing and cap for pintle with removable pin	H01927.00.XX

**NB.** Refer to the price list in force to check the availability of the finishes.